


Regulador bus 1-10 por control remoto  
Remote control 1-10 bus dimming

# R110RC-R110BT

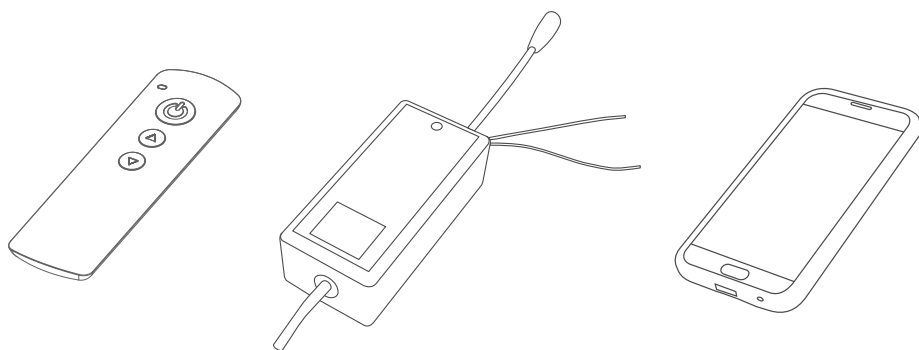


## Características técnicas. Technical Features

Modelo Model	R110RC	R110BT
Rango de tensión Voltage range	230V AC	230V AC
Máxima corriente control (1-10) Maximum control current (1-10)	50mA	50mA
Memoria más reciente Most recent memory	Sí	Sí
Sistema de control Control system	Mando	Smartphone / Bluetooth (Mando opcional)
Dimensiones mando Size control	123x37x10 mm	
Dimensiones equipo Size equipment	120x42x56 mm	
Bus de regulación Control bus	1-10V	1-10V

## Modo de funcionamiento. Operation mode.

Regule la luminosidad de la estancia, encienda o apague la instalación de manera cómoda mediante control remoto.

Regulates the brightness of the room, turn on or off the installation comfortably by remote control.

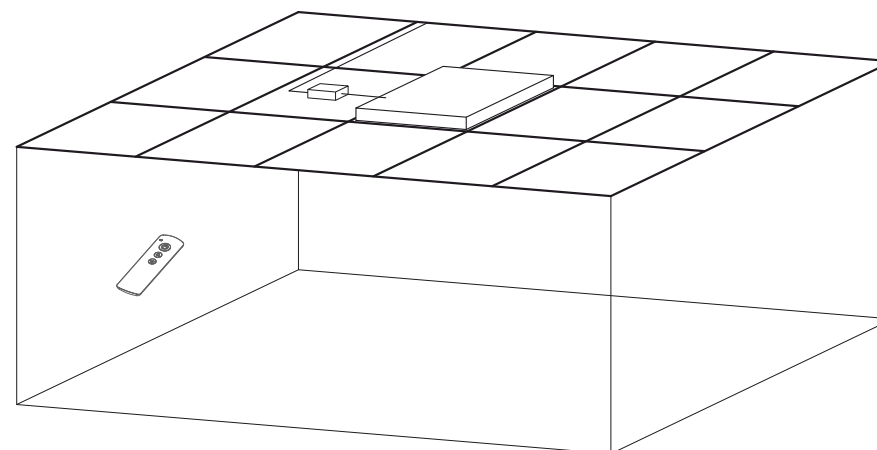

## Productos compatibles PRILED. PRILED Compatible Products.



Downlight LED 25W | 25W LED Downlight  
(Página/Pages 126).  
PWD253NR - PWD254NR



Panel LED/LED panel 600x600-1200x300-1200x600  
(Páginas/Pages 50, 52, 54, 56, 58).  
P6P40X4 - P6P40X6 - Superficie / Continuo  
P3P40X4 - P3P40X6 - Superficie / Continuo  
P12P7X4 - P12P7X6 - Superficie / Continuo



Campana LED / LED high bay  
(Página/Pages 96).  
PHC1206NR - PHC1456NR - PHC2006NR



Campana LED modular / Modular LED high bay  
(Página/Pages 102).  
PHCK07R - PHCK14R - PHCK21R



Pantalla Neophos / Neophos Fittings  
(Página/Pages 70).  
LPL0620NR - LPL1240NR



Pantalla estancia / Weather proof Fittings  
(Página/Pages 84).  
LPL06236R - LPL12236R - LPL12258R



Videos demostrativos:  
[www.priled.eu/videos.html](http://www.priled.eu/videos.html)

